

COLLECT, MONITOR, AND MANAGE YOUR SOLAR SYSTEM PRODUCTION WITH THE TIGO SMART PLATFORM

The Tigo Access Point (TAP) improves the data management of your solar array by wirelessly communicating with Tigo smart modules and retrofit devices. TAP also greatly improves safety with module-level deactivation.

When paired with a Cloud Connect Advanced (CCA), the TAP provides unparalleled visibility into your solar installation.

VISIBILITY

Communicate directly with TS4 units using the Tigo SMART app on a mobile device for the fastest commissioning.

SAFETY

Provide grid status to TS4 MLPE for rapid shutdown UL compliance.

EASE OF INSTALLATION

Improved design flexibility and large inner compartment for quick wiring.



TIGO ACCESS POINT (TAP)

Collect data from up to 300 TS4 units


Wireless mesh communication


High definition sampling rate

Scalable architecture

Mounts easily on module frame without tools





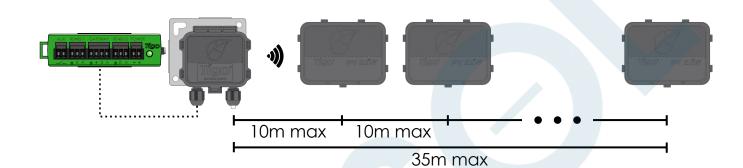

Electrical Specifications
Input voltage range: $5V_{DC} - 25V_{DC}$
Consumption: 0.5W average, 1W peak
Recommended cable type: RS485, 18-22AWG
Mechanical Specifications
Dimensions: 126.2mm x 130.0mm x 26.8mm (with bracket)
Weight: 227g (0.5lbs)
Operating temperature range: -30°C to +70°C (-22°F to +158°F)
Environmental rating: IP68, Type 4R
Range and Capacity
Maximum distance from TAP to closest TS4: 10m (33ft)
Maximum distance from TAP to farthest TS4: 35m (115ft)
Each TAP supports up to 300 TS4 units

For more information on Tigo products:

www.tigoenergy.com/products

For sales and ordering information:

sales@tigoenergy.com or 1.408.402.0802

For technical information:

http://support.tigoenergy.com

For additional info and product selection assistance, use Tigo's online design tool at www.tigoenergy.com/design

Tigo[®] S (\pm)



SOLSOL s.r.o. | Králova 298/4 | Brno 616 00 | Czech Republic Mail: sales@solsol.cz | www.solsol.cz